


4-15. Input Ampl. (A/B/C/D/E/F/G) PCB

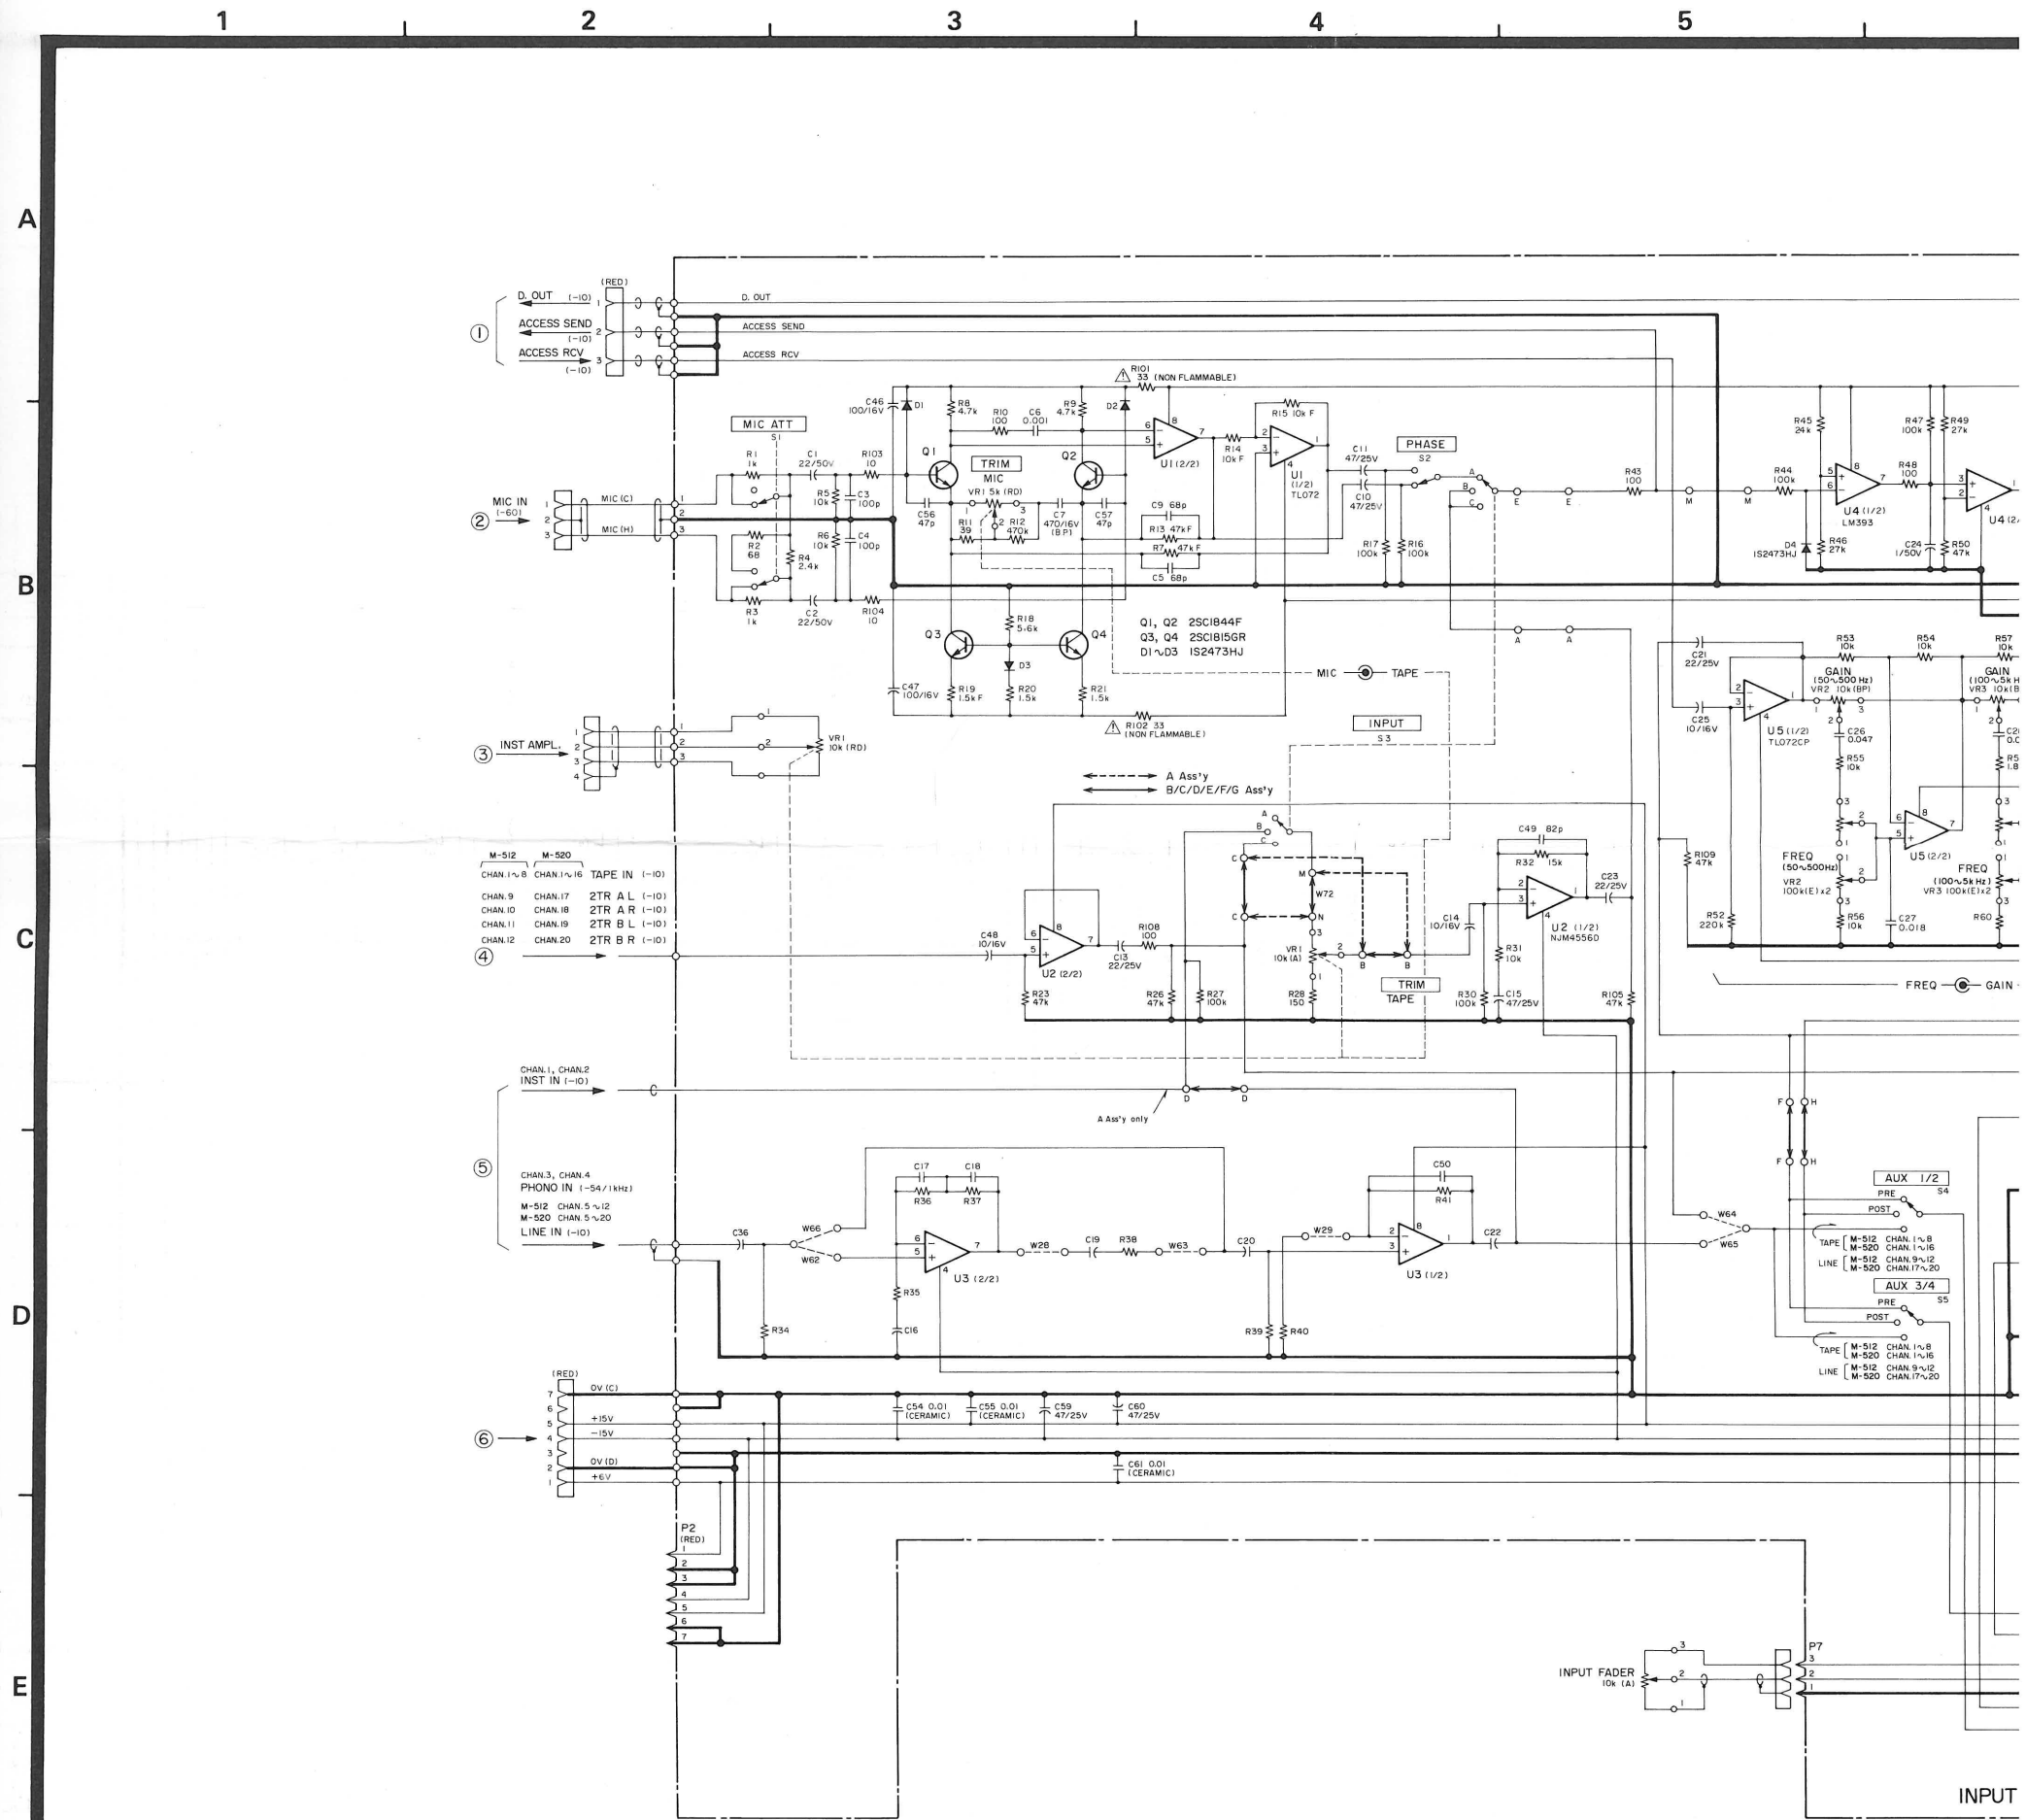

PCB Ass'y	CHANNEL		INPUT POSITION			Ref. No.																																				
	M-512	M-520	A	B	C	U3	VR1	R34	R35	R36	R37	R38	R39	R40	R41	C16	C17	C18	C19	C20	C22	C36	C50	W28	W29	W62	W63	W64	W65	W66	W69	W70	W71	W72								
A	1, 2	1, 2	MIC	INST	TAPE	Not mounted	5k(RD) + 10k(RD) + 10k(A)	Not mounted																Open				Shorting	Open	Open	Open											
B	3	3		PHONO		LINE	TAPE	NJM2041DD	5k(RD) + 10k(A)	47k	47k	47k	560k	1k	1k		10k	100/16V	0.0015 (J)	0.0047 (J)	22/25V	10/16V		82p	Shorting		Shorting				Open	Open	Shorting	Shorting								
C	4	4								Not mounted																100k								Not mounted	0 Ω (Shorting)	Not mounted		10/16V	22/25V	0 Ω (Shorting)	Not mounted	Open
D	5, 6, 7	5, 6, 7 9, 10, 11 13, 14, 15	MIC	LINE	TAPE	NJM2041DD	5k(RD) + 10k(A)	Not mounted					100k		Not mounted	0 Ω (Shorting)	Not mounted		10/16V	22/25V	0 Ω (Shorting)	Not mounted	Open		Open	Shorting	Shorting	Shorting														
E	8	8, 12, 16	MIC	LINE	TAPE			Not mounted					100k		Not mounted	0 Ω (Shorting)	Not mounted		10/16V	22/25V	0 Ω (Shorting)	Not mounted	Open					Open	Shorting	Shorting	Shorting											
F	9	17						2TR A L	TAPE	Not mounted					100k		Not mounted	0 Ω (Shorting)	Not mounted		10/16V	22/25V	0 Ω (Shorting)	Not mounted							Open		Open	Shorting	Shorting	Shorting						
	10	18						2TR A R	TAPE	Not mounted					100k		Not mounted	0 Ω (Shorting)	Not mounted		10/16V	22/25V	0 Ω (Shorting)	Not mounted							Open					Open	Shorting	Shorting	Shorting			
	11	19						2TR B L	TAPE	Not mounted					100k		Not mounted	0 Ω (Shorting)	Not mounted		10/16V	22/25V	0 Ω (Shorting)	Not mounted							Open								Open	Shorting	Shorting	Shorting
G	12	20			2TR B R	TAPE	Not mounted					100k		Not mounted	0 Ω (Shorting)	Not mounted		10/16V	22/25V	0 Ω (Shorting)	Not mounted	Open		Open	Shorting	Shorting	Shorting															

CONN	
MODE	
M-512	A
M-512	A
M-512	A
M-512	A
M-512	A
M-512	A
M-512	A
M-512	A